

WWW.DUAL.DE

DUAL CS 329

FULLY AUTOMATIC PLUG & PLAY TURNTABLE



FULLY AUTOMATIC PLUG & PLAY TURNTABLE

The Dual CS 329: Simplicity with sophistication for the perfect introduction to analogue music playback. With Plug & Play you get a pre-assembled complete package - plug it in and get started straight away!

The fully automatic CS 329 offers convenient convenience as the tonearm swivels, lowers and raises automatically. Simply place the record on top and press the start button. Experience uncomplicated music enjoyment.

**Optimal introduction: The recommendation
for record player beginners**

THE NEW DUAL CS-SERIES

DEVELOPED IN OUR OWN
DESIGN CENTRE IN GERMANY

PRECISION

From clockwork to turntable

QUALITY

5 year warranty

TRADITION

Building turntables for generations



< ALFRED LANGER
ABOUT THE NEW
DUAL CS-SERIES

SPRING LOADED ANTISKATING

DUAL TECHNOLOGY

Stepless adjustment for fine tuning

Dual turntables offer stepless adjustment using a rotary knob, without predetermined increments. The easy-to-read scale serves as a guideline for quick and easy adjustment of the antiskating.

Precise skating correction

An ingenious mechanism with a specially shaped spring ensures precise skating compensation over the entire playback range. Experience precise adjustment for optimum sound quality with this system.



AUTOMATIC

DUAL TECHNOLOGY

Maximum ease of use

Playback can be started and stopped easily and conveniently at the touch of a button.

Without compromise

During playback, the mechanics of the automatic system are decoupled from the tonearm and the platter.



PLINTH: PLASTIC / MDF

- Elastomer vibration absorber inside the feet
- Removable dust cover



PLATTER: ALUMINIUM DIE-CAST

- Precise aluminium die-cast
- Heavy rubber mat for resonance damping



TONEARM: STRAIGHT, STATICALLY BALANCED

- Plug & Play: all adjustments are factory fixed
- Automatic or manual operation



DRIVE: DC- MOTOR / BELT

- Rubber mountings for vibration decoupling
- Precision cut belt for lower wow & flutter



DUAL TECHNICAL SPECIFICATIONS

DUAL CS 329

MOTOR

Drive

Speed settings

Wow & Flutter

Belt

33/45

$< \pm 0,12\%$ (JIS WTD)

TONEARM

Auto-Start/-Stop-Function

Bearing

Effective length

Offset angle

Overhang

Type

Stylus pressure range

Cartridge weight range

Factory installed pick up

Automatic

Ball-bearing

221,5 mm

25,6°

19 mm

Statically balanced

Fixed

N / A

Audio-Technica AT91

PLATTER

Material

Mat

Bearing

Diameter

Weight (incl. Mat)

Aluminium die-cast

Rubber 2,5 mm

Hardened steel spindle
Brass bushing (inverted)

297 mm

667 g

PLINTH

Material

Surface finish

Feet

Connection

Connection to phono input

Connection to line input

Digital Output

Dimension, closed dustcover

Dimension, open dustcover

Weight

Plastic / MDF

Black

Ø 62 mm / Elastomer

RCA cable (fixed)

✓


✓

X

435 x 372 x 132 mm

T: 405 mm / H: 390 mm

5 kg

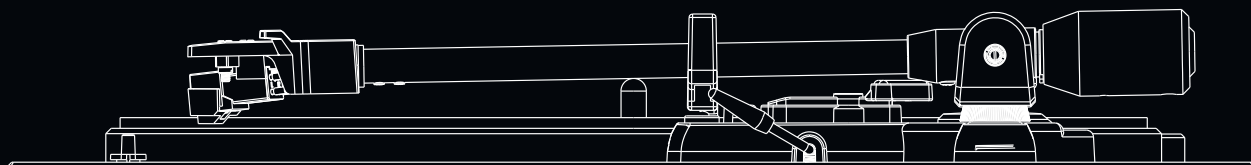

Dual

Dual

**5 YEAR
WARRANTY**

